



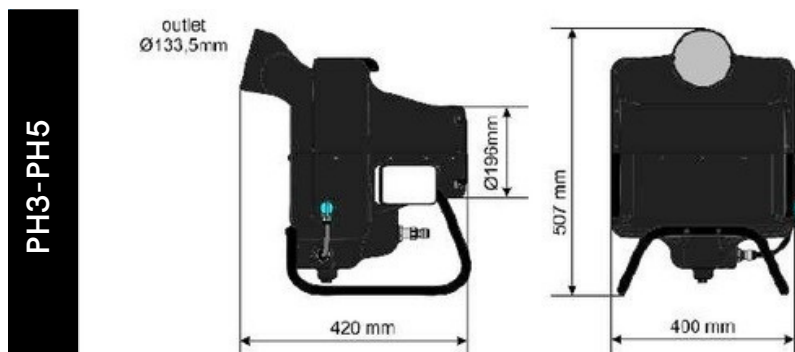

CARACTERÍSTICAS

PH3 es la versión con nebulización muy fina (antigoteo hasta 2,5 l/h). PH5 es la versión capaz de nebulizar hasta 5 l/h con una boca de salida canalizable construida de manera que permite acoplar fácilmente un tubo circular de Ø125 mm (se recomienda una longitud máxima de 5 m). El aire húmedo así canalizado se puede utilizar en conductos de climatización, en U.T.A., en incubadoras y en todos aquellos locales en los que no es posible instalar la máquina por razones de espacio o de seguridad.

CARACTERÍSTICAS	UNIDAD	PH3	PH5
CAPACIDAD DE ATOMIZACIÓN	l/h	MAX 2.5	MAX 5.0
ALIMENTACIÓN ELÉCTRICA	-	MONOFÁSICO	MONOFÁSICO
PESO	Kg	12	12
GRADO DE PROTECCIÓN	IP	56	56
HUMIDIFICADOR			
POTENCIA ABSORBIDA	W	280	280
TENSION	V	230	230
CORRIENTE	A	1.7	1.7
FRECUENCIA	Hz	50	50
BOMBA			
POTENCIA ABSORBIDA	W	14	14
TENSION	V	230	230
FRECUENCIA	Hz	50	50

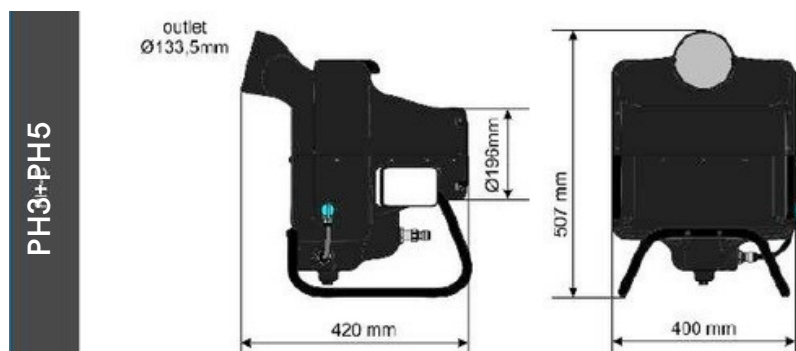

FEATURES

PH3 is the version with very fine atomization (anti-drip up to 2.5 l/h).

PH5 is the version capable of atomizing up to 5 l/h, featuring a ductable air outlet designed to allow easy connection of a Ø125 mm circular duct (recommended with a maximum length of 5 m). The humid air conveyed in this way can be used in air-conditioning ducts, AHUs, incubators, and in all environments where installation of the unit is not possible due to space or safety constraints.

TECHNICAL SPECIFICATIONS	UNIT	PH3	PH5
ATOMIZATION CAPACITY	l/h	MAX 2.5	MAX 5.0
POWER SUPPLY	-	SINGLE-PHASE	SINGLE-PHASE
WEIGHT	Kg	12	12
DEGREE OF PROTECTION	IP	56	56
HUMIDIFIER			
POWER INPUT	W	280	280
VOLTAGE	V	230	230
CURRENT	A	1.7	1.7
FREQUENCY	Hz	50	50
PUMP			
POWER INPUT	W	14	14
VOLTAGE	V	230	230
FREQUENCY	Hz	50	50