




UCP FLY 15
UCP FLY 20
UCP FLY 25



CARACTERÍSTICAS

El UCP Fly es una unidad compacta que utiliza un solo motor para ventilar, humidificar y funcionar como enfriador adiabático. Gracias a sus materiales resistentes a la corrosión, es apto incluso para los entornos más hostiles. Ideal para instalaciones ganaderas pequeñas y medianas, como establos, criaderos, gallineros y cualquier otro lugar que requiera temperaturas más bajas o la pulverización de desinfectantes. En agricultura, humidifica granjas de champiñones, cámaras frigoríficas o tratamientos de control de plagas. También es ideal para aplicaciones industriales en áreas que requieren humedad controlada.

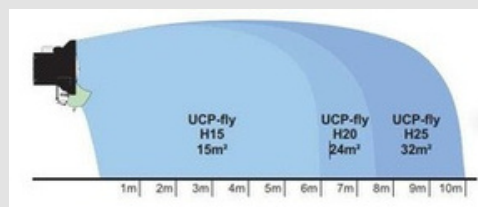

CARACTERÍSTICAS	UNIDAD	H15	H20	H25
CAPACIDAD DE ATOMIZACIÓN	lit/h	MÁXIMO 25	MÁXIMO 25	MÁXIMO 25
ALIMENTACIÓN ELÉCTRICA	-	1 ~	1 ~	1 ~
PESO	Kg	10	10	10
CAUDAL DE AIRE	m³/h	750	1100	1800
CARACTERÍSTICAS ELÉCTRICAS				
POTENCIA ABSORBIDA	W	320	340	380
TENSION	V	230	230	230
CORRIENTE	A	1.8	1.9	2.0
FRECUENCIA	Hz	50	50	50
GRADO DE PROTECCIÓN	IP	55	55	55



UCP FLY 15
UCP FLY 20
UCP FLY 25




FEATURES

The **UCP Fly** is a compact unit that, with a single motor, provides ventilation, humidification and can also be used as an adiabatic cooler. Thanks to the materials used, it is resistant to corrosion and is suitable even for the most demanding environments.

It is ideal for use in small and medium-sized livestock facilities such as stables, hatcheries and poultry houses, and in all situations where it is necessary to reduce temperature or nebulize disinfectants. In agriculture, it is used to humidify mushroom growing rooms, refrigerated storage cells, or for disinfection treatments.

It is also ideal for industrial applications in areas where controlled humidity levels are required.

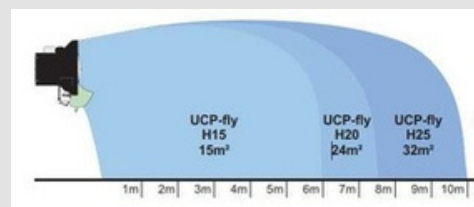

TECHNICAL SPECIFICATIONS	UNIT	H15	H20	H25
ATOMIZATION CAPACITY	lit/h	UP TO 25	UP TO 25	UP TO 25
POWER SUPPLY	-	1 ~	1 ~	1 ~
WEIGHT	Kg	10	10	10
AIRFLOW	m³/h	750	1100	1800
ELECTRICAL SPECIFICATIONS				
POWER INPUT	W	320	340	380
VOLTAGE	V	230	230	230
CURRENT	A	1.8	1.9	2.0
FREQUENCY	Hz	50	50	50
DEGREE OF PROTECTION	IP	55	55	55